

WALA Rabbet-Tiles

Liquid-tight. Non-slip. Robust.





For the most demanding applications in commercial kitchens and in the food sector

- liquid-tight
- hygienic
- easy to clean (meets HACCP)
- non-slip, even when wet
- wear-resistant and robust (trolley use!)
- dimensionally stable and pressure resistant
- virtually flame-retardant
- resistant to chemicals and greases
- sound-absorbing
- ergonomic



The **WALA-rabbet-tile** (500 x 500 x 6/10 mm) is completely bonded and is **cold and heat-sealed** afterwards.
The flooring is then **absolutely 100% sealed**.

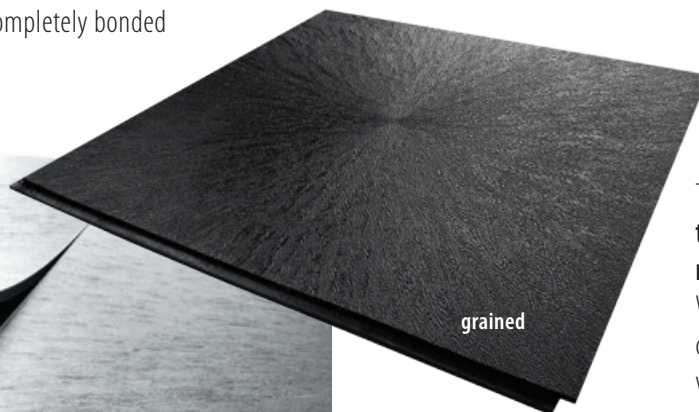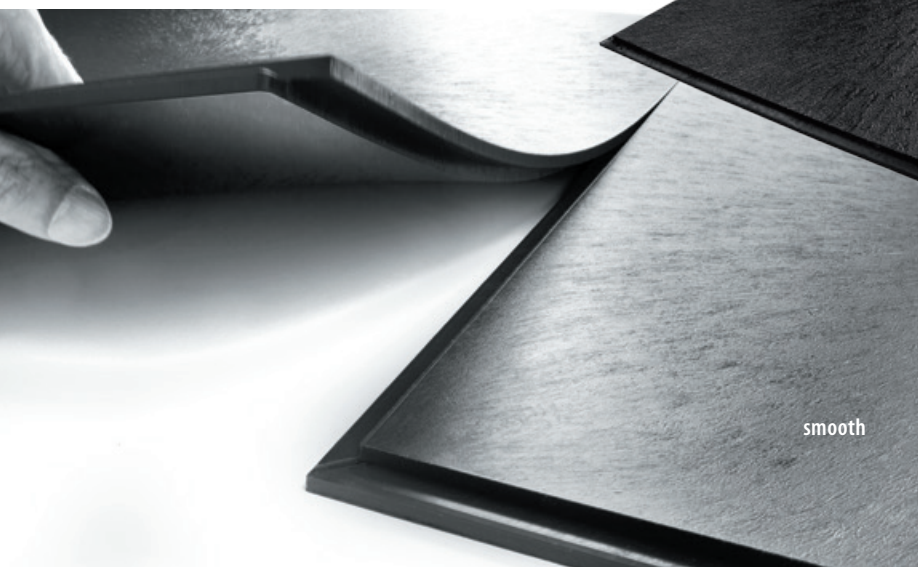

The **WALAstic-rabbet-tiles** are made from **recycled PVC**.
When desired the tiles can also be made from virgin PVC.

Colours:
black
anthracite

Our flooring has been used for years in commercial kitchens in the hospital sector, in gastronomy, in hotel kitchens, dairies and cheese factories, snack bars, butcheries, bakeries and in the food production sector.




Since 12 January 2015 we are in possession of a Wheelmark Certification for our WALA-floor-tiles type Marine 6 mm.

Our WALA-rabbit-tiles are therefore approved for installation in ships galleys.

Different working areas can be identified by marking with varicolored strips or tiles or by using printed tiles.




Coloured strips for sealing the tiles

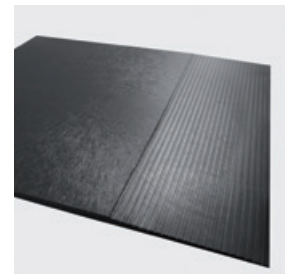


WALAstic Step-Up Tile

The **WALA cove moulding skirting** allows the use of our floor-tiles in particularly sensitive areas. This is a hygienic, easy-to-clean and visually appealing solution.

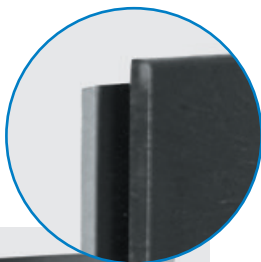

With a height of 160 mm, it seamlessly conforms to the amount of wall protection often desired in this area. With the new coordinated inside and outside corners, it is furnished not only with a prefabricated notch for connection to the next board, but also with a lip for the sealing compound. The back side is rounded allowing a better fit to non-angular walls and corners.

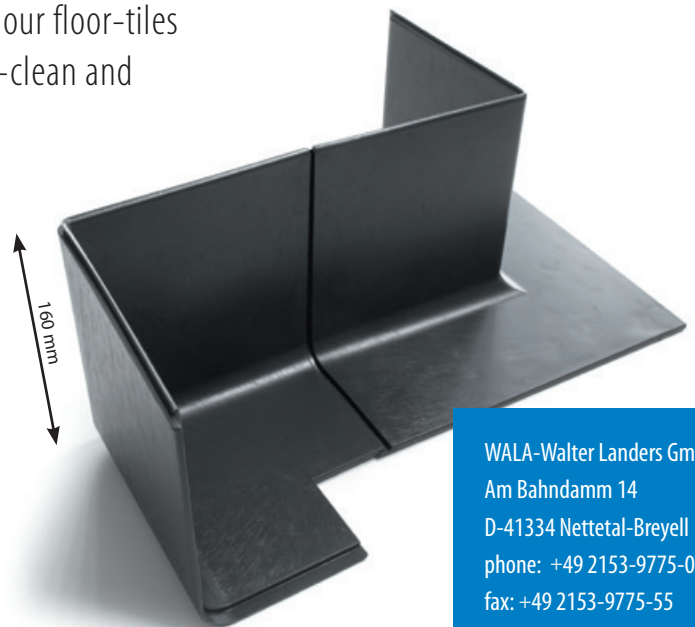

WALA-Walter Landers GmbH
 Am Bahndamm 14
 D-41334 Nettetal-Breyell
 phone: +49 2153-9775-0
 fax: +49 2153-9775-55
 mail:wala-floor.de