

# WALA<sup>®</sup>stic

## clip tile 15 mm

### FOR PARTICULAR CHALLENGES

The *WALA*stic clip tile 15 mm is particularly suitable for oil-stained, dirty or residual damp flooring due to integrated ligaments and cavities on the reverse side.



## WALA<sup>®</sup> stic clip tile 15 mm


Measures: 445 x 445 mm

Thickness: 15 mm

Standard colors:  
black & anthracite

Surfaces:  
smooth & grained

Matching step-up tiles

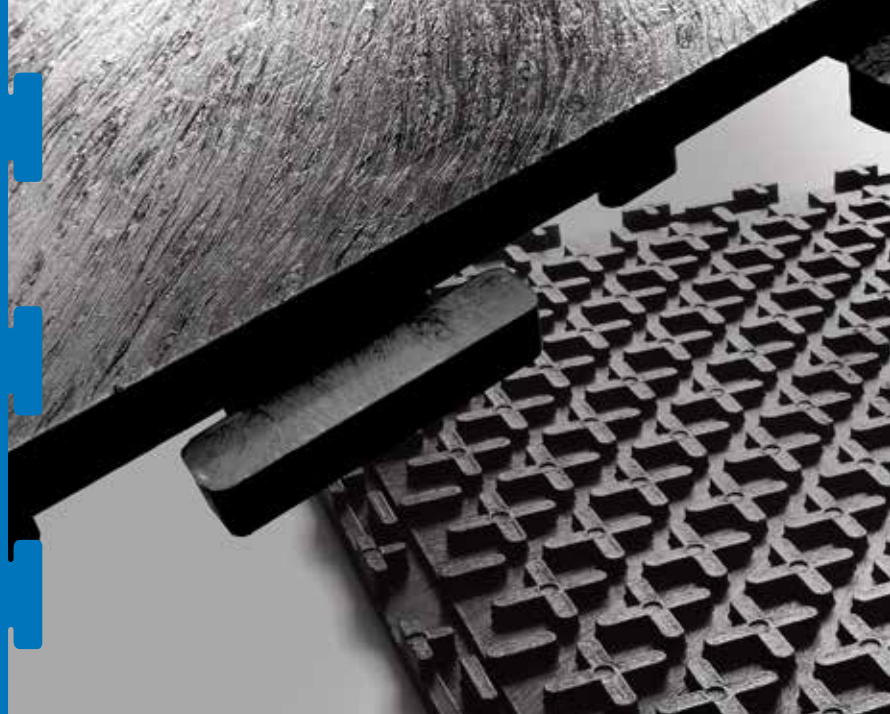

### ROBUST & EXTREMELY DURABLE

- resistant to oil, grease and a variety of leaches.
- anti-slip effect, chemical-resistant, liquid-tight, virtually flame-retardant
- forklift resistant, impact & shockproof
- insulating, ergonomic, soundproofing
- quick installation, no downtime, instantly load-resistant
- refurbishment on all stable subfloors
- suitable for oil-stained, damp / wet floors

